





Augenti<sup>®</sup>  
LIGHTING



150

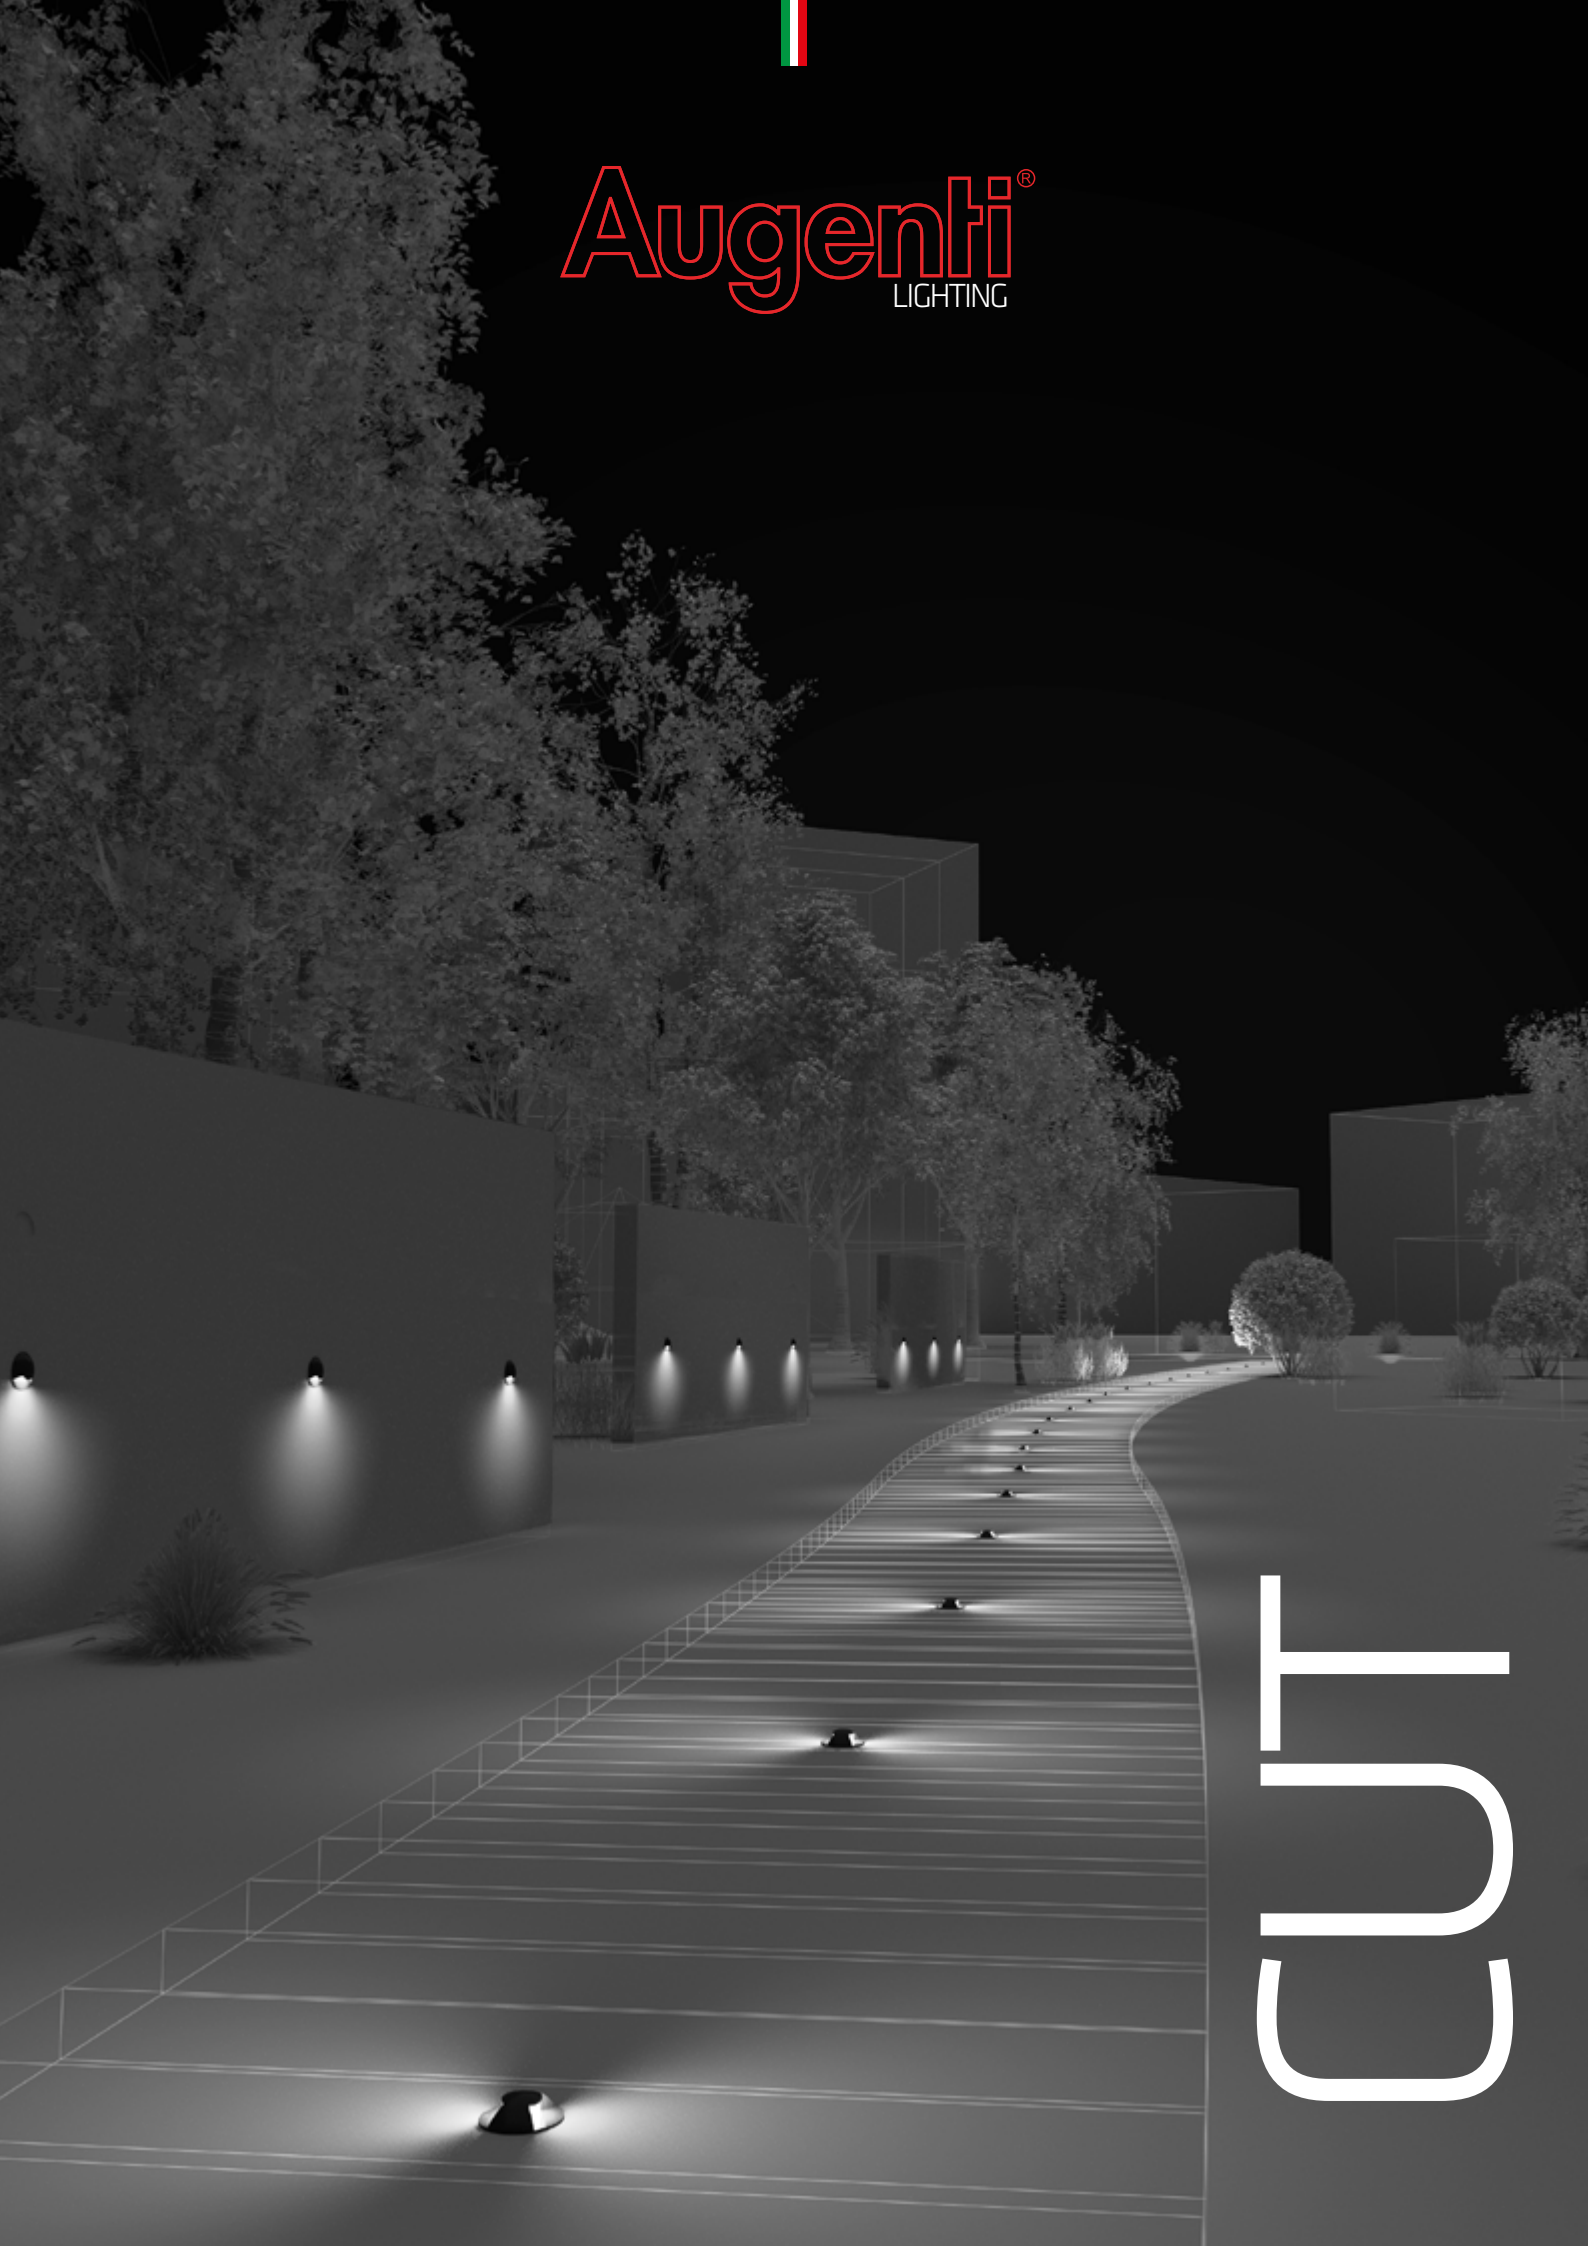

IN THE  
PASSAGES  
OF LIGHT  
THE SHADOW  
COMES OUT

**CUT** collection

# CUT collection

**Cut** è la nuova linea di segnapasso a luce radente nata per creare **suggestivi effetti di luce ed ombra**, proposta in **diametri da 45 mm e 70 mm**. Ideale per dare vita a percorsi luminosi residenziali o pubblici, **Cut** trova facile collocazione anche a parete o soffitto, rendendosi quasi invisibile ma facendo in modo che la luce e l'atmosfera create siano le protagoniste della scena. Proposto ad **una, due o quattro fessure**, **Cut** diventa l'apparecchio ideale per effetti morbidi o d'accento, per installazioni singole o in serie. Il grado di protezione IP67 ed il sistema AcquaStop per la protezione anti-condensa, infine, rendono **Cut** un prodotto affidabile e sicuro, ideale per **suscitare emozioni di luce**.

**Cut** is the new line of steplight with grazing light born to create **suggestive light and shadow effects**, available in **diameters of 45 mm and 70 mm**. Design to give life to residential and public walk ways, also available with dedicated wall and ceiling version, making itself almost invisible but keeping light and atmosphere created the main characters of the scene. **With one, two or four slots**, **Cut** becomes a perfect fixture for soft or strong effects, for single or series installations. IP67 degree protection combined with AcquaStop system for anti-condensation protection make **Cut** a reliable and safe product, **to inspire light emotions**.

**Cut** est la nouvelle ligne de balises lumineuses rasantes créées pour créer des **effets d'ombre et de lumière suggestifs**, disponibles en **diamètres de 45 mm et 70 mm**. Idéal pour donner vie aux parcours lumineux résidentiels ou publics, **Cut** trouve également un placement facile sur les murs ou les plafonds, se rendant presque invisible mais en veillant à ce que la lumière et l'atmosphère créées soient les protagonistes de la scène. Proposé avec **une, deux ou quatre fentes**, **Cut** devient le luminaire idéal pour des effets doux ou d'accentuation, pour des installations simples ou en série. Enfin, le degré de protection IP67 et le système AcquaStop de protection anti-condensation font de **Cut** un produit fiable et sûr, idéal pour **susciter des émotions de lumière**.



# CUT

collection

**AcquaStop** è una speciale lavorazione all'interno del prodotto che, attraverso varie fasi di resinatura, crea una vera e propria barriera, sigillando la lampada in maniera definitiva e prevenendo quindi la formazione di condensa all'interno di essa.

**AcquaStop** is a special process inside product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside.

**Acquastop** est un procédé spécifique à l'intérieur du produit, qui grâce à différentes mises en oeuvres de couches d'étanchéités, crée une barrière définitive à la formation de condensation à l'intérieur du luminaire.

# acquaSTOP



# CUT

collection



CUT 45  
collection



# Fixture Specifications

Protection . IP 67 - IK 08

Body . Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance

Box . Polypropylene

Screen . Transparent Polycarbonate

Seals . EPDM rubber

Paint / Finishing . Anti-corrosive UV stabilised polyester powder

CUT 45  
led WHITE



1L  
1 Window



2L  
2 Windows



4L  
4 Windows

Finishes

NEW COLOR




55  
GREEN COOL MINT  
RAL 6019



00  
PURE WHITE  
RAL 9016




01  
BLACK  
RAL 9005



10  
WHITE  
RAL 9010



24  
BRONZE



25  
RUST



30  
ANTHRACITE



35  
SLATE GREY



40  
GREY  
RAL 9006


## Technical Data

1L 1 FINESTRA - 1 WINDOW

2L 2 FINESTRE - 2 WINDOWS

4L 4 FINESTRE - 4 WINDOWS

3000K - 4000K




Ø45




Ø45




Ø45



Ø35



Ø35



Ø35

Versione in Tensione - Constant voltage (Vdc)

2W con DRIVER REMOTO 24Vdc - 2W REMOTE DRIVER 24Vdc

Versione in Corrente - Constant current (mA)

2W con DRIVER REMOTO MAX 700mA DC - 2W REMOTE DRIVER max 700mA DC

Quote espresse in millimetri "mm"

Share expressed in millimeters "mm"

Sizes . H70 x Ø35 x Ø ring 45

Versione in Tensione - Constant voltage (Vdc)

code	beam	class	power	W	source	fixture	CCT LED	CRI
4045R/WRRC1L	1L 1 Window	III	24Vdc	2W	170 lm	16 lm	3000K	80
4045R/NRRC1L	1L 1 Window	III	24Vdc	2W	190 lm	20 lm	4000K	80
4045R/WRRC2L	2L 2 Windows	III	24Vdc	2W	170 lm	27 lm	3000K	80
4045R/NRRC2L	2L 2 Windows	III	24Vdc	2W	190 lm	31 lm	4000K	80
4045R/WRRC4L	4L 4 Windows	III	24Vdc	2W	170 lm	41 lm	3000K	80
4045R/NRRC4L	4L 4 Windows	III	24Vdc	2W	190 lm	45 lm	4000K	80

LED SYSTEM WITH REMOTE DRIVER 24V

Versione in Corrente - Constant current (mA)

code	beam	class	power	W	source	fixture	CCT LED	CRI
4045R/WRCC1L	1L 1 Window	III	700mA	2W	220 lm	24 lm	3000K	80
4045R/NRCC1L	1L 1 Window	III	700mA	2W	240 lm	30 lm	4000K	80
4045R/WRCC2L	2L 2 Windows	III	700mA	2W	220 lm	41 lm	3000K	80
4045R/NRCC2L	2L 2 Windows	III	700mA	2W	240 lm	47 lm	4000K	80
4045R/WRCC4L	4L 4 Windows	III	700mA	2W	220 lm	62 lm	3000K	80
4045R/NRCC4L	4L 4 Windows	III	700mA	2W	240 lm	62 lm	4000K	80

LED SYSTEM WITH REMOTE DRIVER max 700mA DC




## Accessories

informazioni sugli accessori sul nostro sito web  
information about accessories on our website

DRIVER 24Vdc / mA

HUB for electronic parts

Underground CASING



## Specifications






## Specifications



Assembly / Usage  
Ground installation

# CUT 45 light diffusion

CUT  
collection

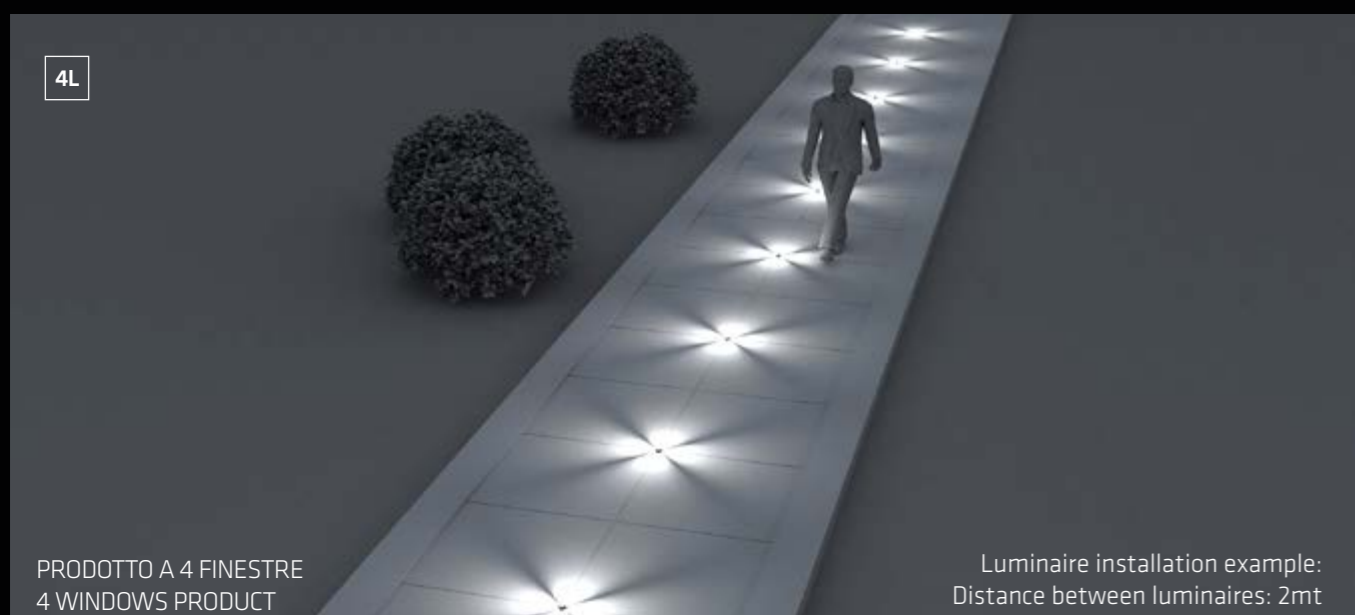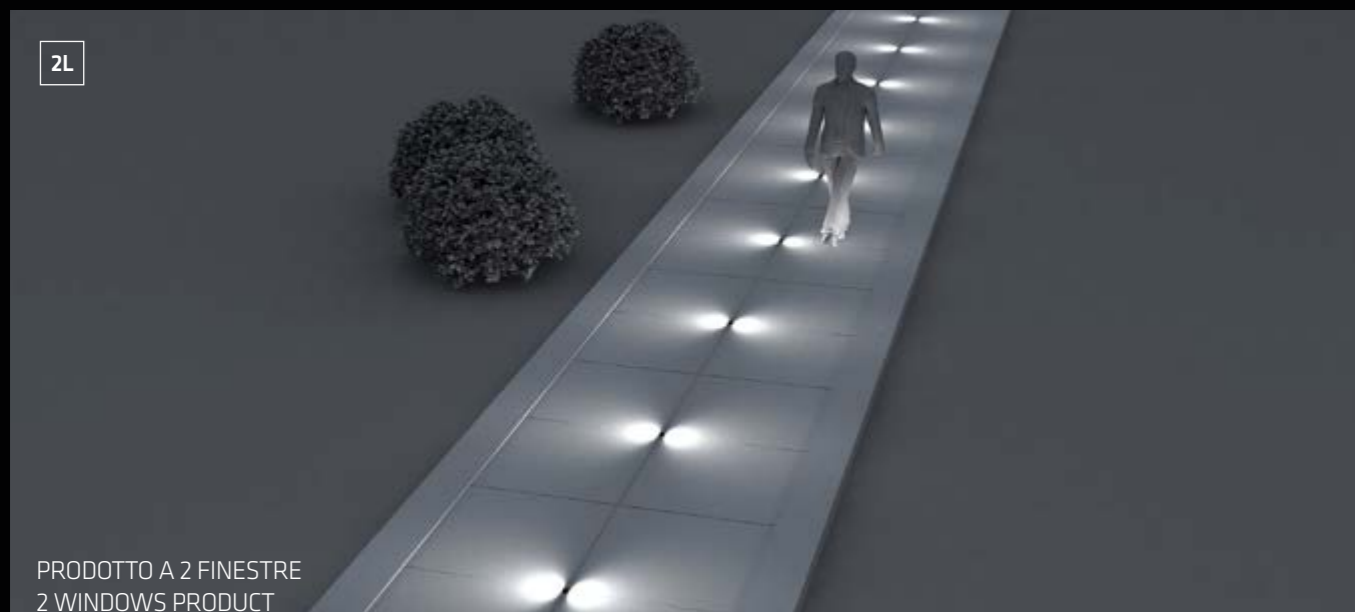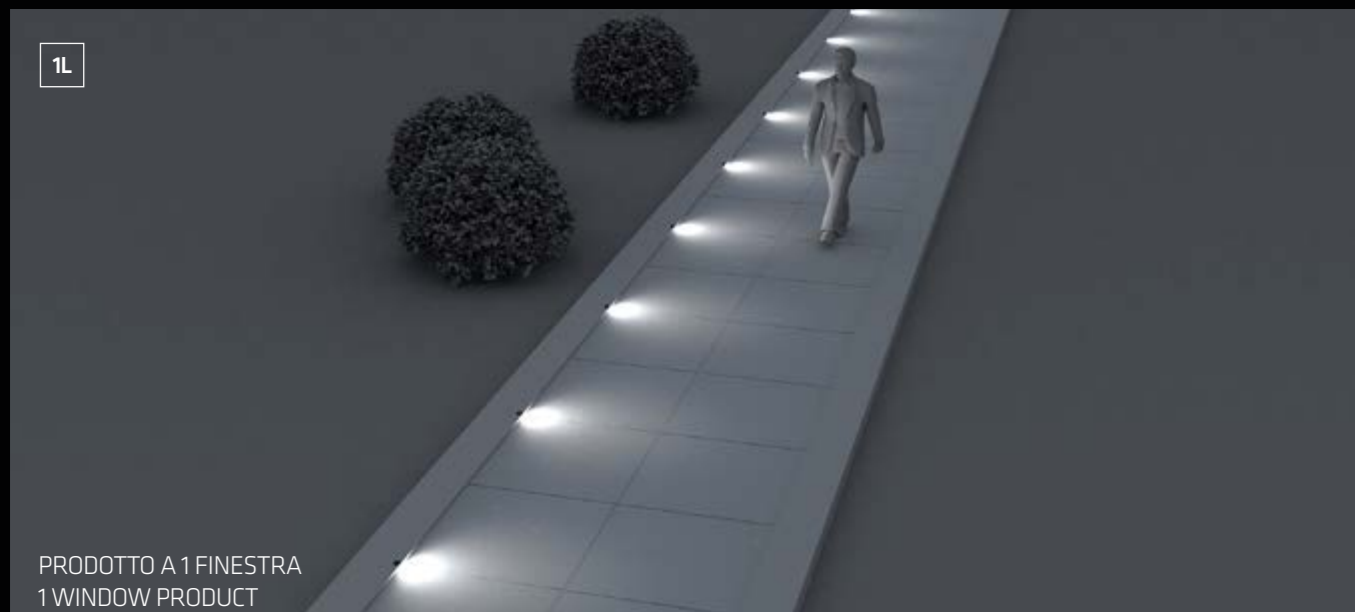

# CUT 45 light diffusion

CUT  
collection

1L




PRODOTTO A 1 FINESTRA - 1 WINDOW PRODUCT

2L



PRODOTTO A 2 FINESTRE - 2 WINDOWS PRODUCT

4L

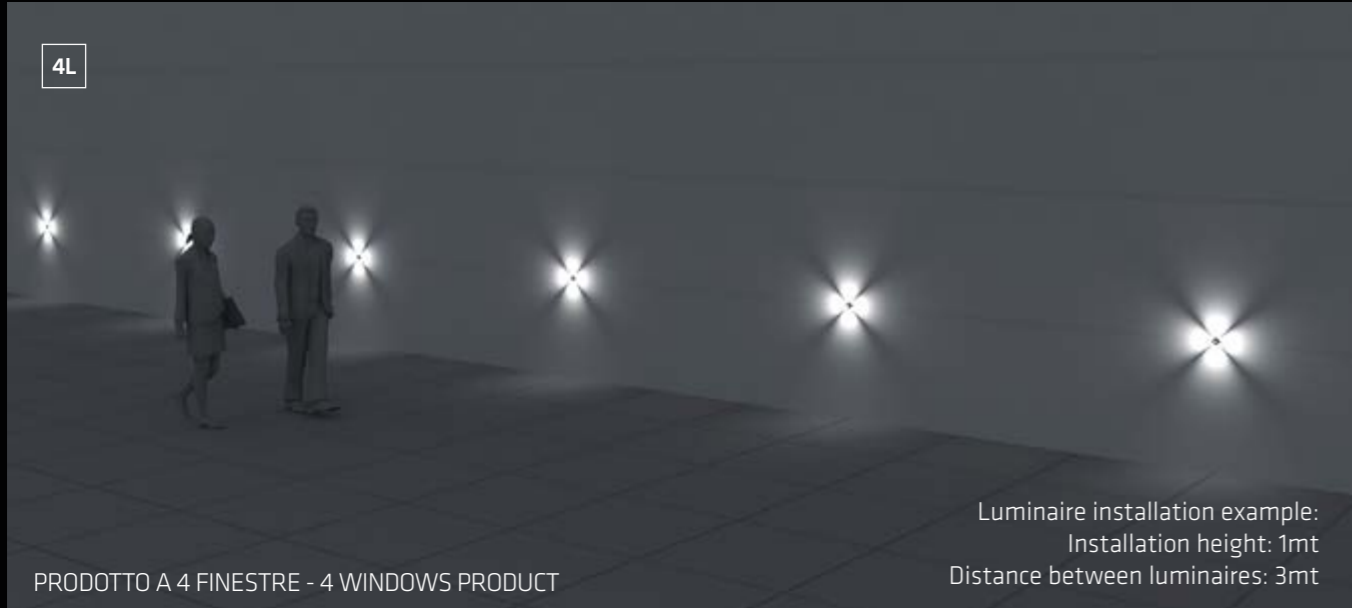

PRODOTTO A 4 FINESTRE - 4 WINDOWS PRODUCT

Luminaire installation example:  
Installation height: 1mt  
Distance between luminaires: 3mt





# Fixture Specifications

Protection . IP67 - IK08

Body . Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance

Box . Polypropylene



Screen . Transparent Polycarbonate

Seals . EPDM rubber

Paint / Finishing . Anti-corrosive UV stabilised polyester powder


## Finishes

NEW COLOR



## Technical Data

- 1L** 1 FINESTRA - 1 WINDOW
- 2L** 2 FINESTRE - 2 WINDOWS
- 4L** 4 FINESTRE - 4 WINDOWS

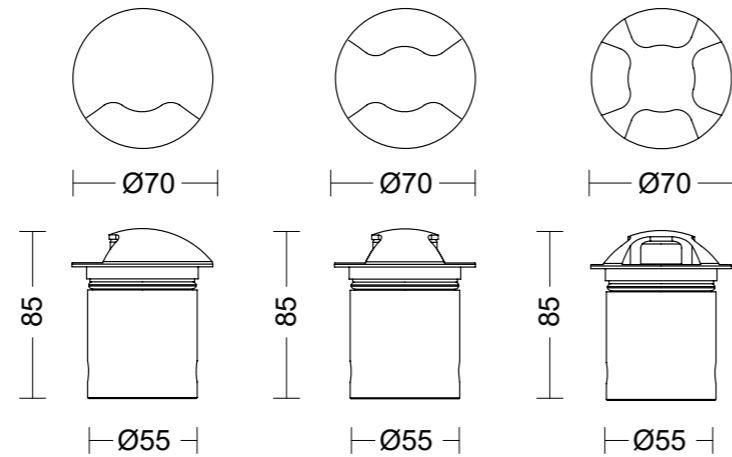

3000K - 4000K

**Versione in Tensione - Constant voltage (Vdc)**  
6W con DRIVER REMOTO 24Vdc - 6W REMOTE DRIVER 24Vdc

**Versione in Corrente - Constant current (mA)**  
6W con DRIVER REMOTO MAX 500mA DC - 6W REMOTE DRIVER max 500mA DC

Quote espresse in millimetri "mm"  
Share expressed in millimeters "mm"

Sizes . H85 x Ø55 x Ø ring 70

### Specifications



**1L**  
1 Window



**2L**  
2 Windows



**4L**  
4 Windows

### Versione in Tensione - Constant voltage (Vdc)

code	beam	class	power	W	source	fixture	CCT LED	CRI
<b>4070R</b> /WRRC1L	1L 1 Window	III	24Vdc	6W	690 lm	41 lm	3000K	80
<b>4070R</b> /NRRC1L	1L 1 Window	III	24Vdc	6W	750 lm	45 lm	4000K	80
<b>4070R</b> /WRRC2L	2L 2 Windows	III	24Vdc	6W	690 lm	77 lm	3000K	80
<b>4070R</b> /NRRC2L	2L 2 Windows	III	24Vdc	6W	750 lm	79 lm	4000K	80
<b>4070R</b> /WRRC4L	4L 4 Windows	III	24Vdc	6W	690 lm	81 lm	3000K	80
<b>4070R</b> /NRRC4L	4L 4 Windows	III	24Vdc	6W	750 lm	85 lm	4000K	80

### LED SYSTEM WITH REMOTE DRIVER 24V

### Versione in Corrente - Constant current (mA)

code	beam	class	power	W	source	fixture	CCT LED	CRI
<b>4070R</b> /WRCC1L	1L 1 Window	III	500mA	6W	690 lm	41 lm	3000K	80
<b>4070R</b> /NRCC1L	1L 1 Window	III	500mA	6W	750 lm	45 lm	4000K	80
<b>4070R</b> /WRCC2L	2L 2 Windows	III	500mA	6W	690 lm	77 lm	3000K	80
<b>4070R</b> /NRCC2L	2L 2 Windows	III	500mA	6W	750 lm	79 lm	4000K	80
<b>4070R</b> /WRCC4L	4L 4 Windows	III	500mA	6W	690 lm	81 lm	3000K	80
<b>4070R</b> /NRCC4L	4L 4 Windows	III	500mA	6W	750 lm	85 lm	4000K	80

### LED SYSTEM WITH REMOTE DRIVER max 500mA DC




## Accessories

informazioni sugli accessori sul nostro sito web  
information about accessories on our website

DRIVER 24Vdc / mA

HUB for electronic parts

Underground CASING



### Specifications



Assembly / Usage  
Ground installation



# CUT 70 light diffusion

1L

PRODOTTO A 1 FINESTRA  
1 WINDOW PRODUCT

2L


PRODOTTO A 2 FINESTRE  
2 WINDOWS PRODUCT

4L

PRODOTTO A 4 FINESTRE  
4 WINDOWS PRODUCT

Luminaire installation example:  
Distance between luminaires: 2mt

15  
collection

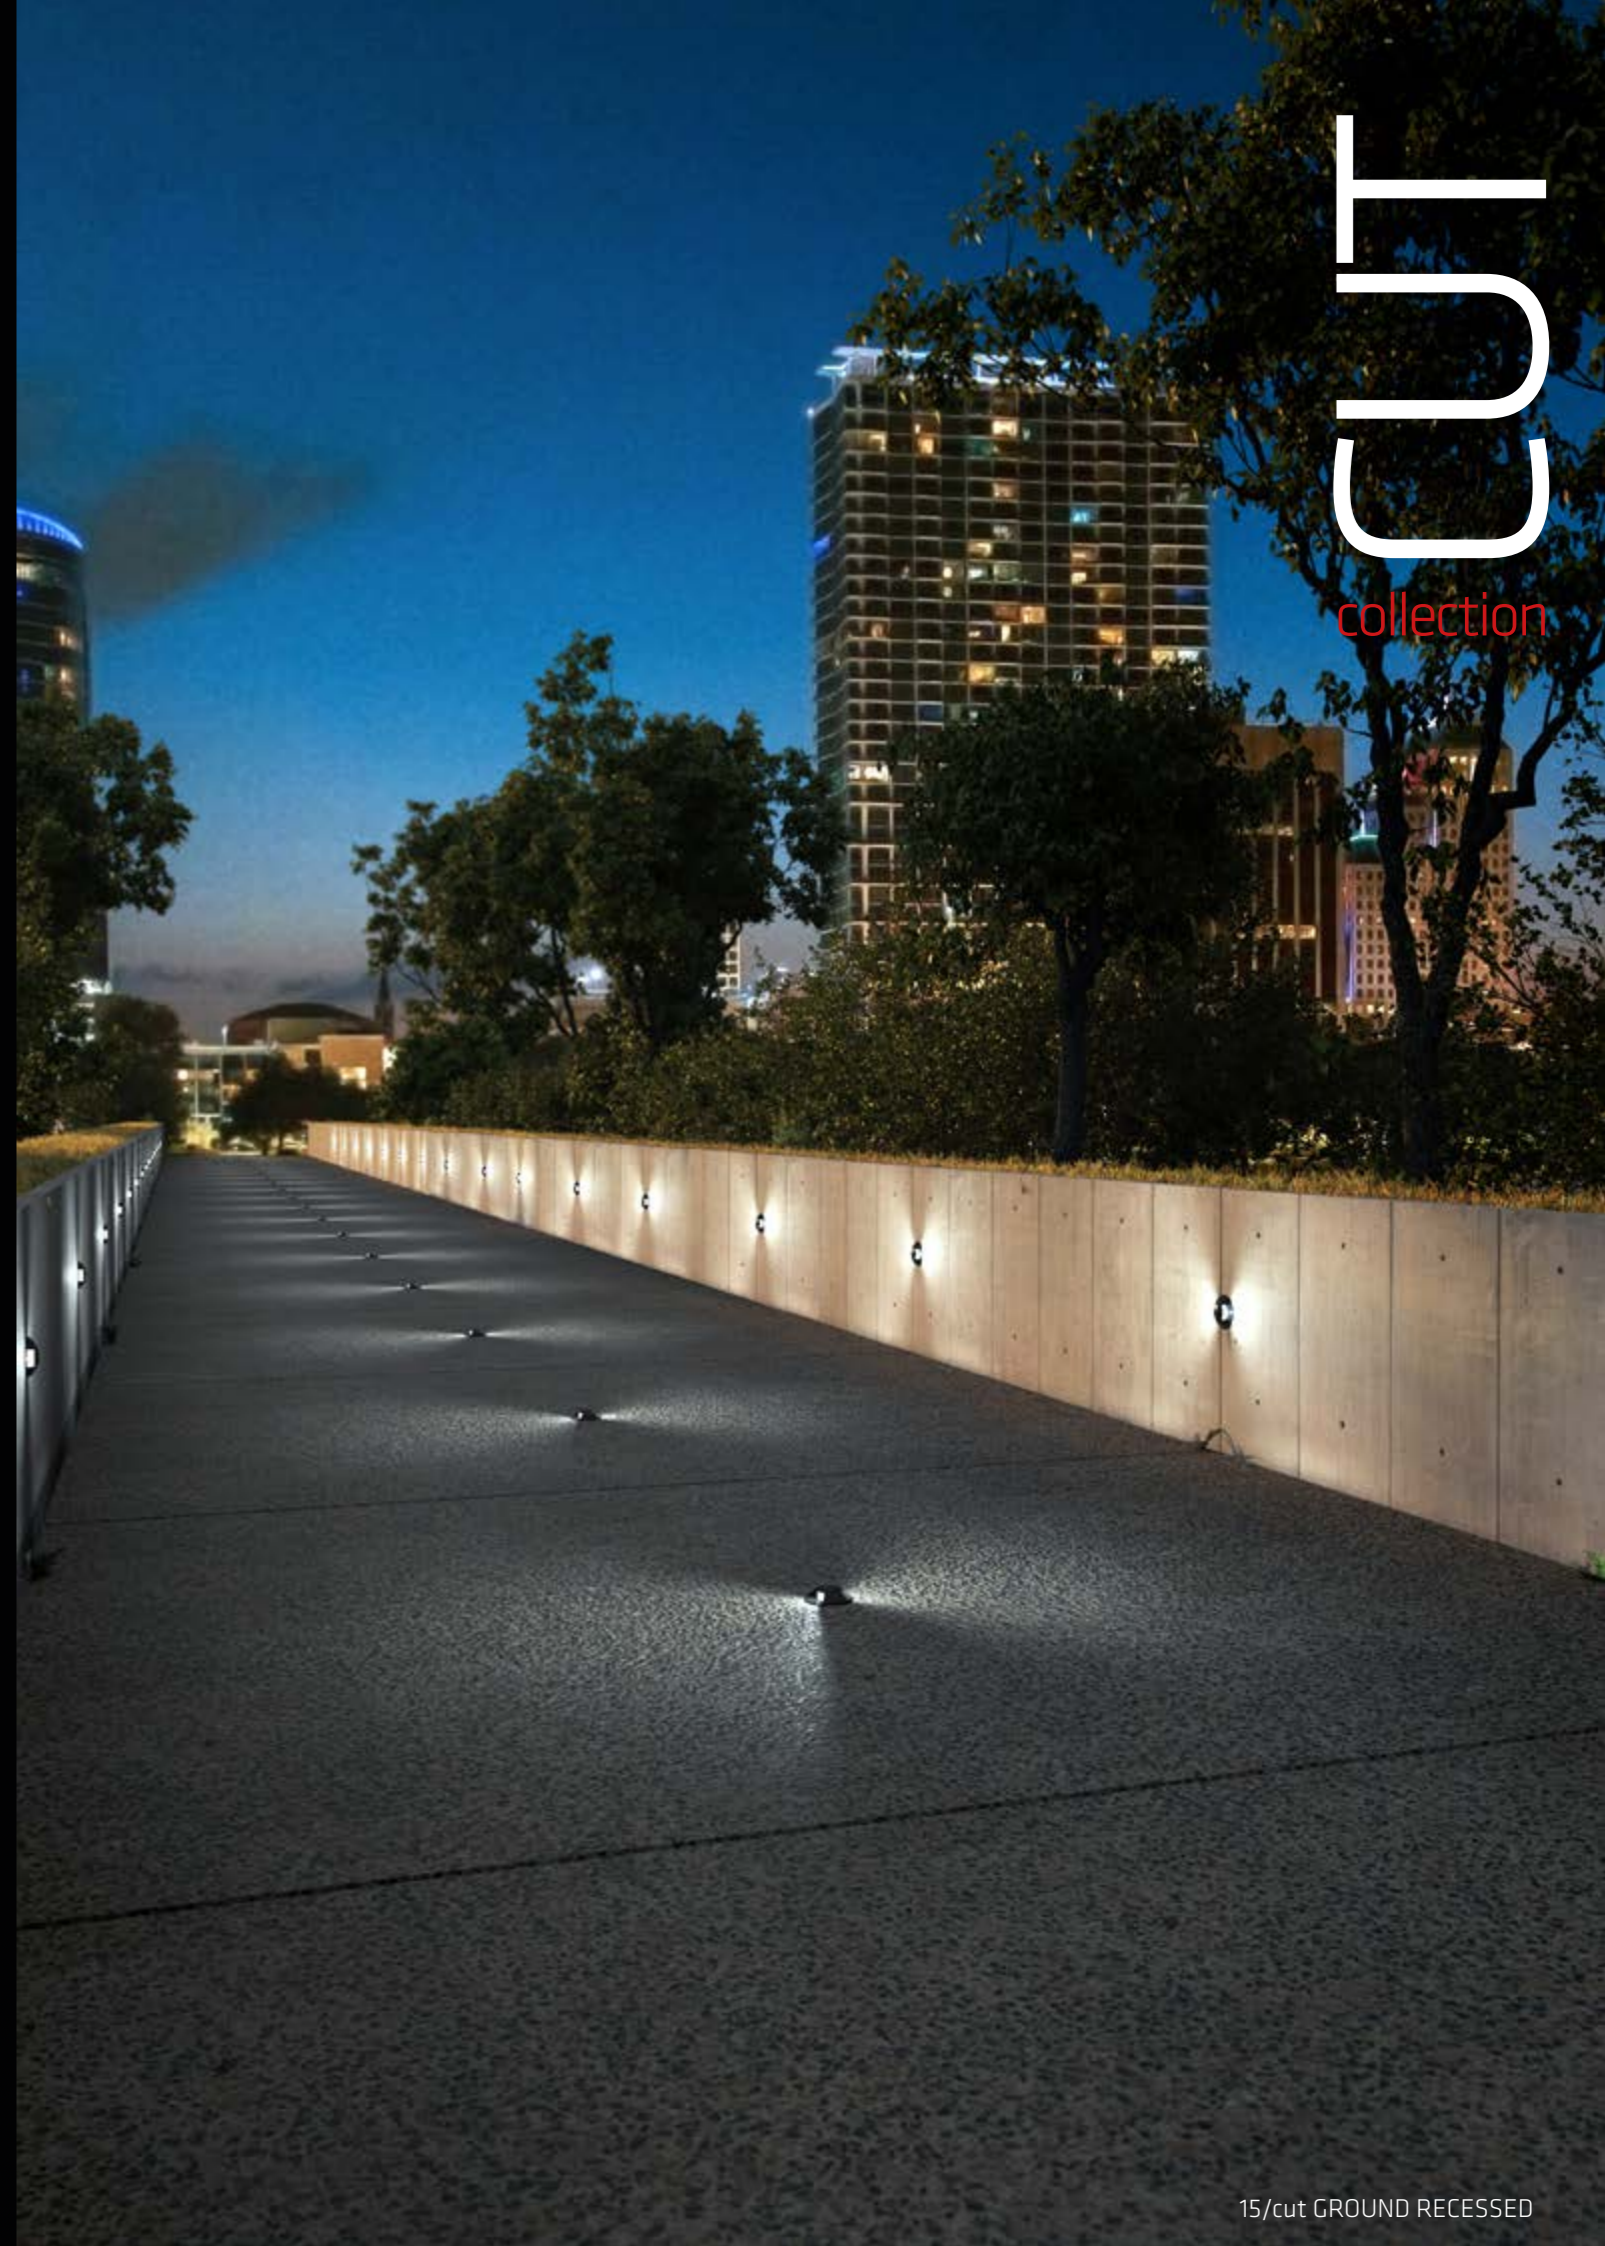

# CUT 70 light diffusion

ES  
collection

1L




PRODOTTO A 1 FINESTRA - 1 WINDOW PRODUCT

2L




PRODOTTO A 2 FINESTRE - 2 WINDOWS PRODUCT

4L

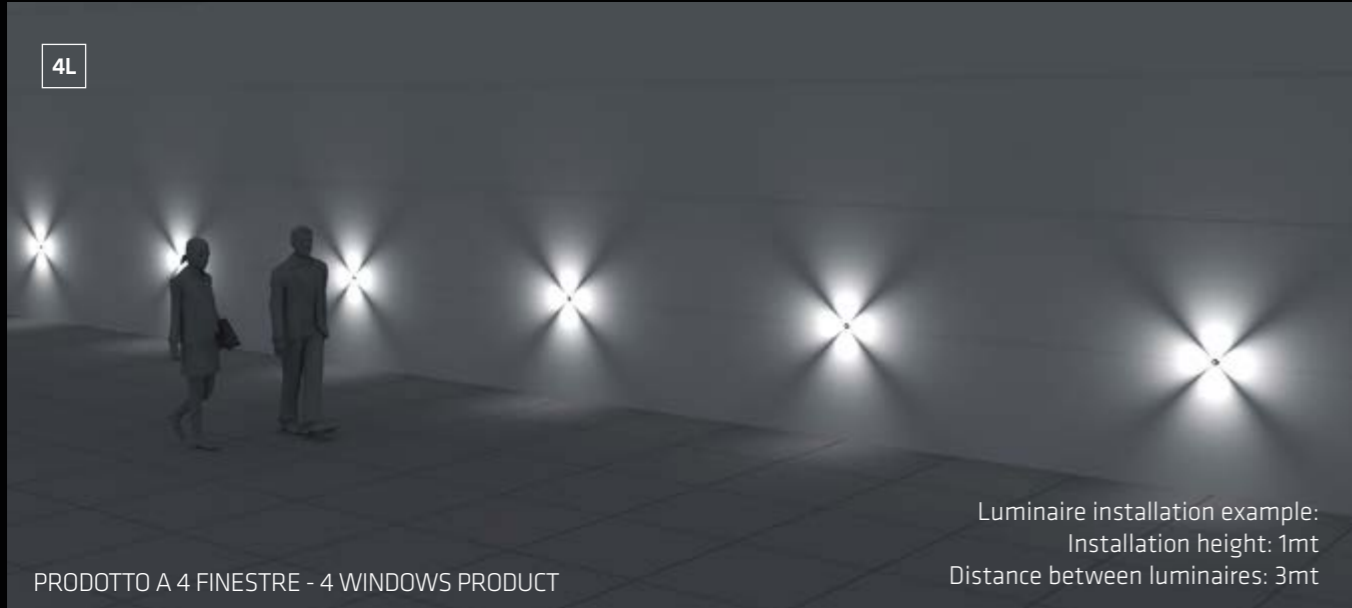

PRODOTTO A 4 FINESTRE - 4 WINDOWS PRODUCT

Luminaire installation example:  
Installation height: 1mt  
Distance between luminaires: 3mt

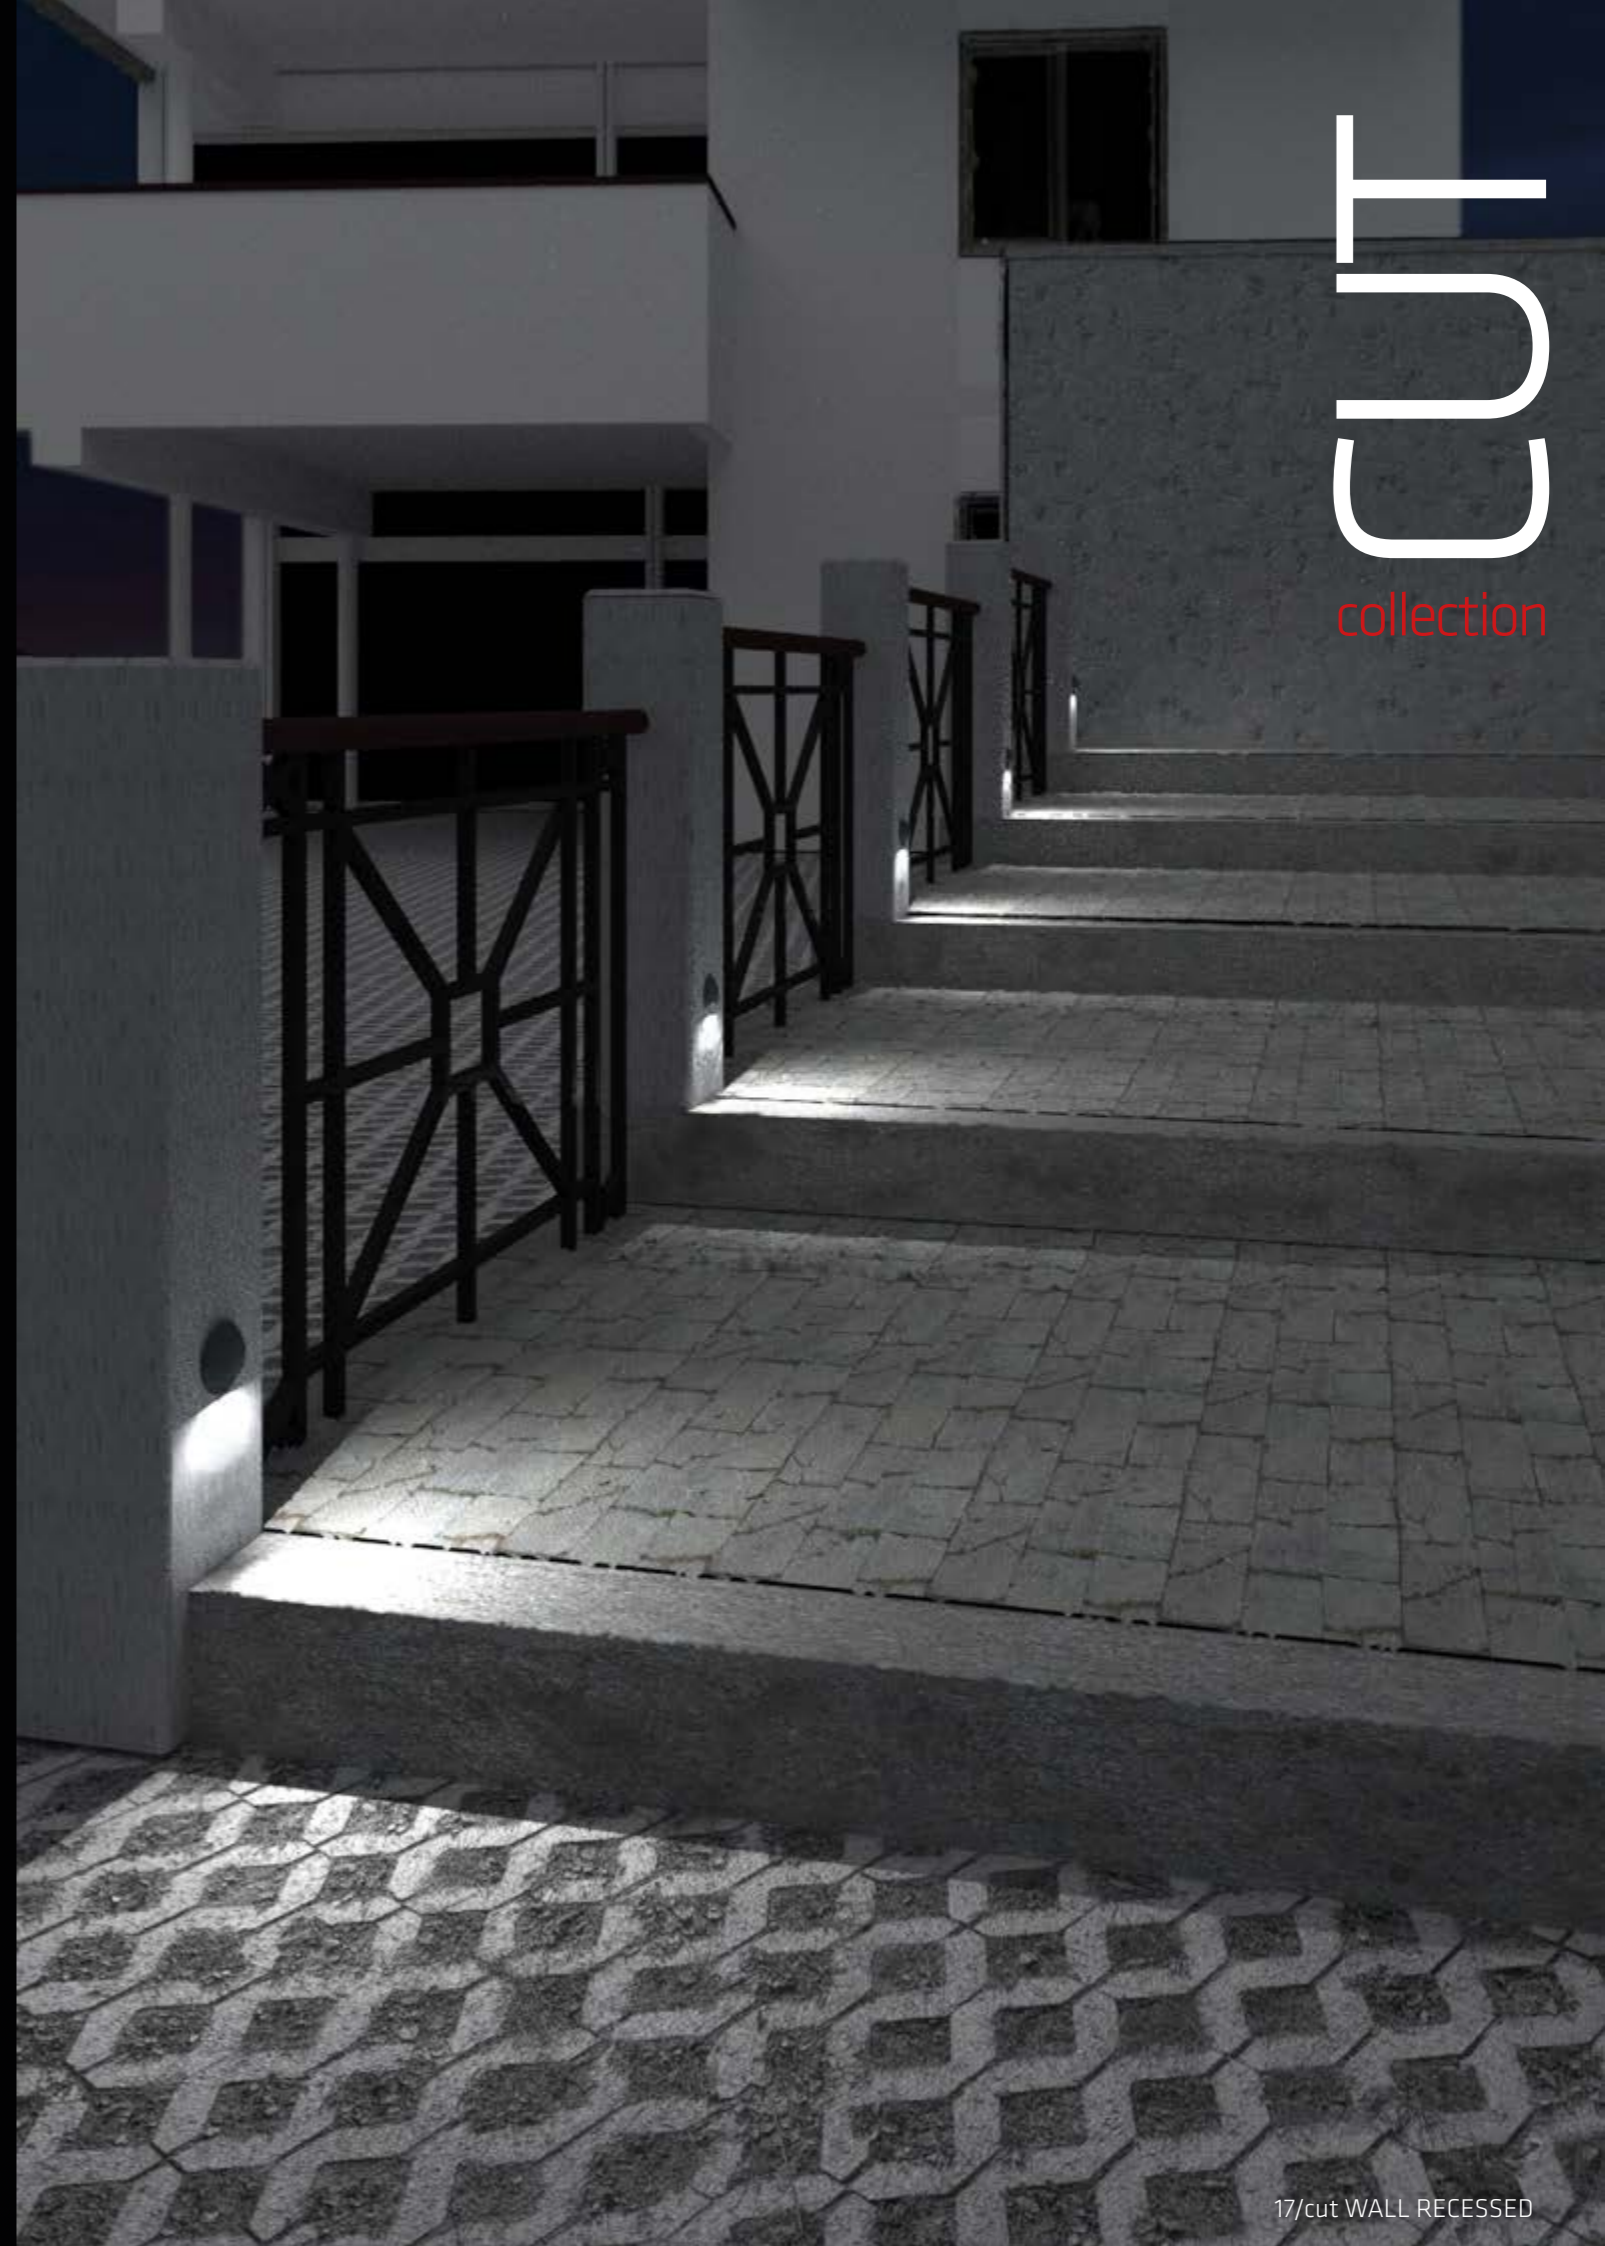

# CUT

collection



**CUT**  
GOOD  
INSTALLATION  
BY Augenti<sup>®</sup>  
LIGHTING DESIGN



# Augenti®

LIGHTING DESIGN

FRAMON GROUP



**AUGENTI LIGHTING S.R.L.** UNIPERSONALE

Via Francesco Lana, 31 - 25065 Lumezzane (BS) Italy - tel: (+39) 030 7282524 - fax: (+39) 030 7281879  
info@augentilighting.it - www.augentilighting.it