



Augenti[®]
LIGHTING

MODOWALL





LIGHT
UP
YOUR
WALLS

MODO WALL

MODO WALL

Linea minimale e **dimensioni compatte** conferiscono a **Modo** la possibilità di diventare un **semplice ma funzionale wallwasher a parete verticale o orizzontale**. Combinato in un **sistema modulare** componibile in entrambe le direzioni planari, **Modo** si presta ad essere un **prodotto** estremamente **adattabile**. **Un sistema**, quindi, più che un singolo volume, **in grado di evolvere** in varianti geometriche e ottiche e di supportare le **molteplici esigenze** del lighting designer.

Minimal lines and **compact dimensions** give **Modo** the possibility of becoming a **simple but functional vertical or horizontal wall washer**.

Combined in a **modular system** in both planar directions, **Modo** lends itself to being an extremely **adaptable product**.

A system, therefore, more than a single volume, **able to evolve** in geometric and optical variants and to support the **multiple needs** of the lighting designer.

La ligne minimale et les **dimensions compactes** donnent à **Modo** la possibilité de devenir un **lèche-mur vertical ou horizontal simple mais fonctionnel**.

Combiné dans un **système modulaire** dans les deux directions planes, **Modo** se prête à être un **produit** extrêmement **adaptable**.

Un système, donc, plus qu'un seul volume, **capable d'évoluer** dans des variantes géométriques et optiques et de répondre aux **multiples besoins** du concepteur lumière.



MODO
WALL

MODO WALL

Module SINGLE EMISSION



MODO 601W

light DIFFUSION



12°

Single/12°

28°

Single/28°

50°

Single/50°

AS

Single/Asymmetric



MODO
601W

MODO WALL

Double Module DOUBLE EMISSION



MODO **602W**

light DIFFUSION



NW
Dual/12°+50°

NB
Dual/12°

MB
Dual/28°

WB
Dual/50°

AB
Dual/Asymmetric



MODO
602W



MODO WALL

Module Single EMISSION BLADE OF LIGHT




MODO 603W

light DIFFUSION

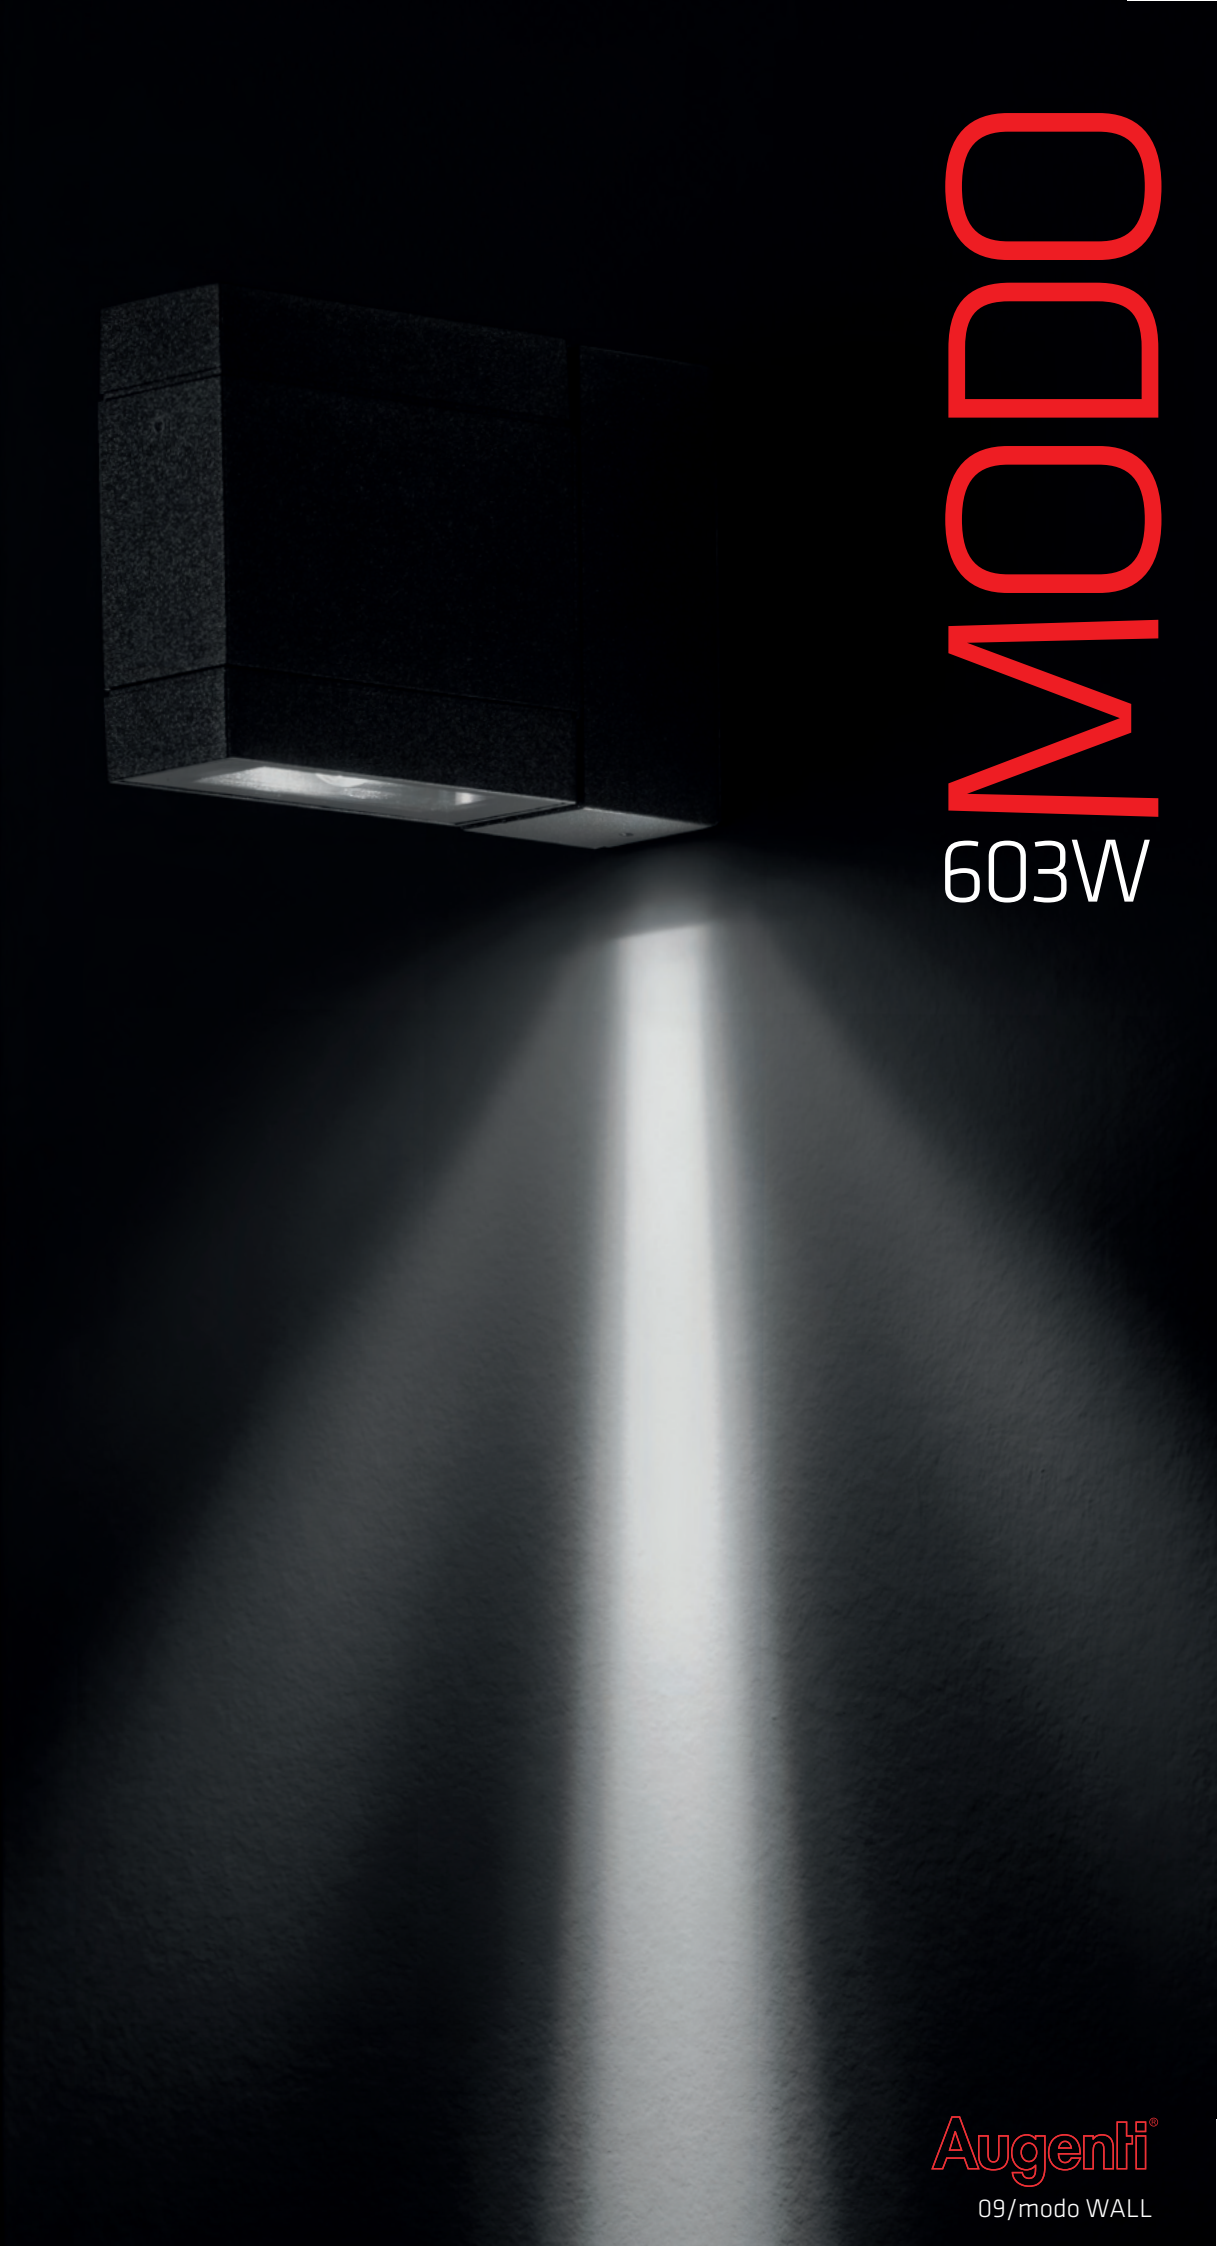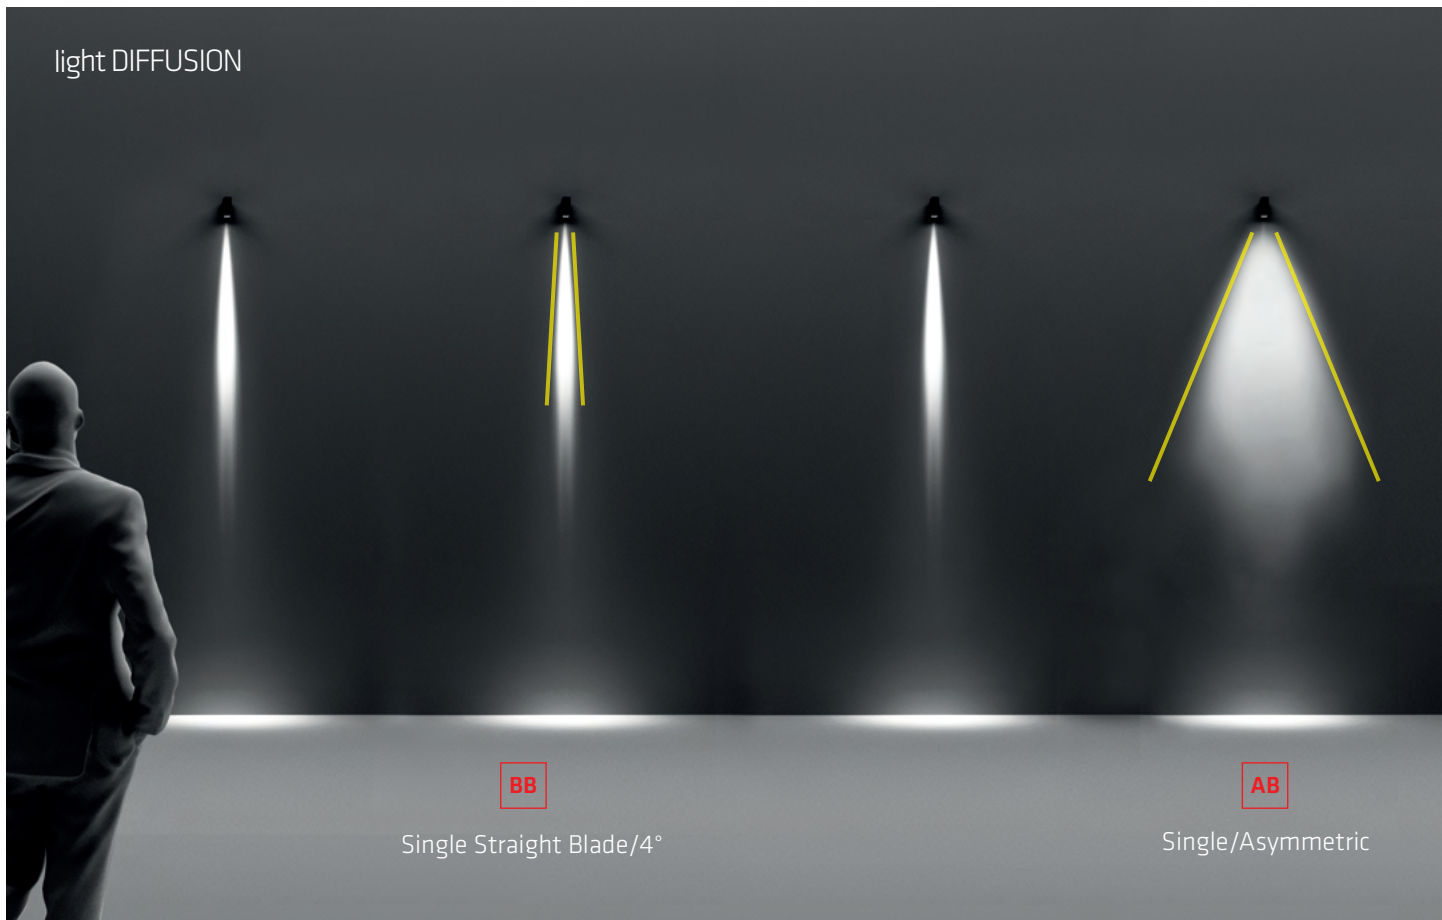

MODO
603W

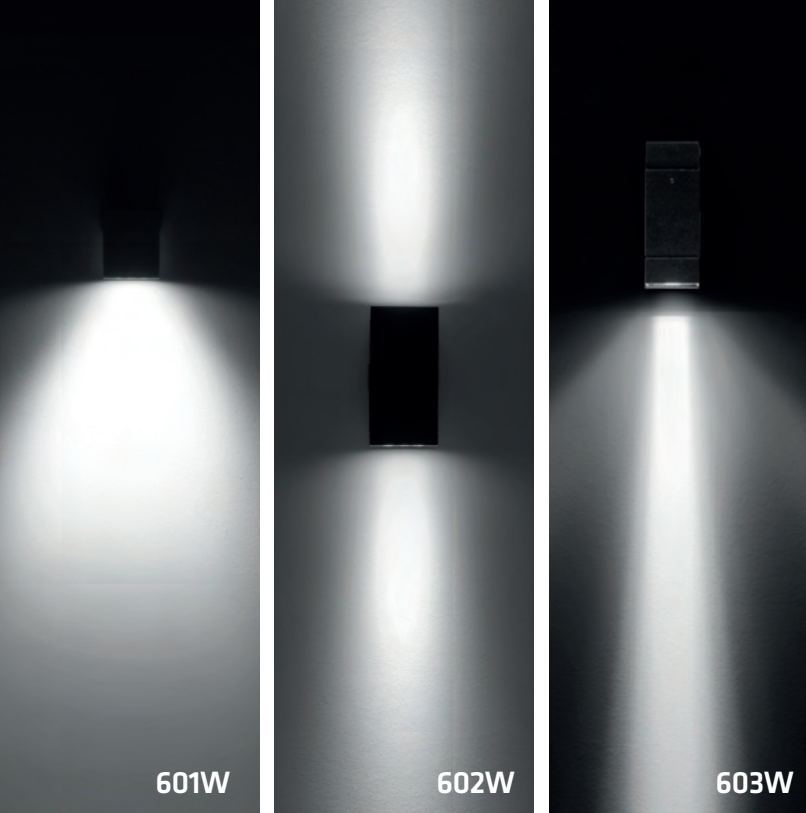

Fixture Specifications

Protection . IP 65 - IK 07

Body . Die-cast aluminium

Screen . Tempered Extra-clear Glass 4mm
with silk-screen printing

Seals . Closed-cell EPDM rubber

Screws . Stainless steel A2

Paint / Finishing . Anti-corrosive UV stabilised
polyester powder

MODO 601W

Module **SINGLE EMISSION** - led WHITE

LED SYSTEM WITH BUILT-IN DRIVER

code	beam	class	W	source	fixture	CCT LED	CRI
601W1 /WP70NB	NB Single/12°	I	8W	790 lm	662 lm	3000 K	80
601W1 /NP70NB	NB Single/12°	I	8W	900 lm	741 lm	4000 K	80
601W1 /WP70MB	MB Single/28°	I	8W	790 lm	656 lm	3000 K	80
601W1 /NP70MB	MB Single/28°	I	8W	900 lm	738 lm	4000 K	80
601W1 /WP70WB	WB Single/50°	I	8W	790 lm	643 lm	3000 K	80
601W1 /NP70WB	WB Single/50°	I	8W	900 lm	726 lm	4000 K	80
601W1 /WP70AB	AB Single/Asymmetric	I	8W	790 lm	660 lm	3000 K	80
601W1 /NP70AB	AB Single/Asymmetric	I	8W	900 lm	739 lm	4000 K	80

Finishes

00
PURE WHITE
RAL 9016

01
BLACK
RAL 9005

10
WHITE
RAL 9010

24
BRONZE

25
RUST


30
ANTHRACITE

35
SLATE GREY

40
GREY
RAL 9006

Assembly

Alimentazione / Main Supply

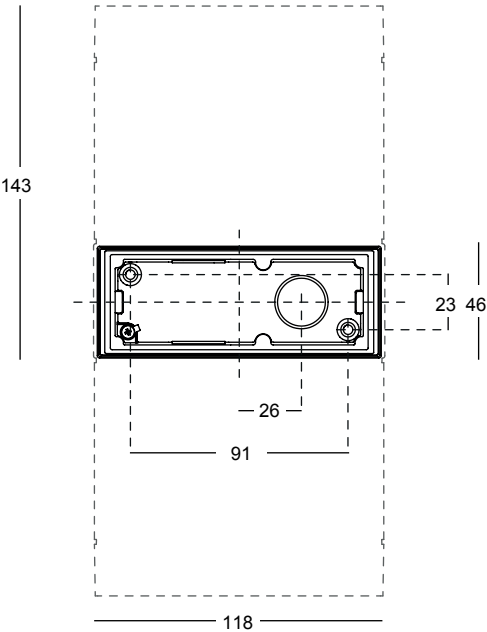

Parete / Wall / Mur


Application



Residential areas



Cycle
Pedestrian paths




Access areas



Parks
Gardens

POSSIBLE TO INSTALL IN BOTH DIRECTIONS



Sizes . H 143 x L 118 x W 69



Assembly / Usage
Wall installation

12°	HEIGHT - DIAMETER	MAX LUX
Hmt.1 - Ømt.0.24	•	8119
Hmt.2 - Ømt.0.49	•	2030
Hmt.3 - Ømt.0.73	•	902
Hmt.4 - Ømt.0.98	•	507
Hmt.5 - Ømt.1.22	•	325
NB		
28°	HEIGHT - DIAMETER	MAX LUX
Hmt.1 - Ømt.0.50	•	1462
Hmt.2 - Ømt.1.00	•	365
Hmt.3 - Ømt.1.49	•	162
Hmt.4 - Ømt.1.99	•	91
Hmt.5 - Ømt.2.49	•	58
MB		
50°	HEIGHT - DIAMETER	MAX LUX
Hmt.1 - Ømt.0.95	•	875
Hmt.2 - Ømt.1.90	•	219
Hmt.3 - Ømt.2.85	•	97
Hmt.4 - Ømt.3.80	•	55
Hmt.5 - Ømt.4.75	•	35
WB		
AB	HEIGHT - DIAMETER	MAX LUX
Hmt.1 - Ømt.1.11	•	2268
Hmt.2 - Ømt.2.22	•	567
Hmt.3 - Ømt.3.34	•	252
Hmt.4 - Ømt.4.45	•	142
Hmt.5 - Ømt.5.56	•	91
AB		

Specifications



Input Supply 220-240Vac 50/60Hz

LED SYSTEM WITH BUILT-IN DRIVER

Assembly / Usage

Wall installation

Parete / Wall / Mur

LED SYSTEM WITH BUILT-IN DRIVER

Assembly / Usage

Wall installation

13/modo WALL



MODDO

601W

BEAM

NB

MB

WB

AB

minimal line
compact dimensions
modular system



MODDO 602W

BEAM

NB


MB

WB

AB

NW

different product
infinite capabilities
can be combined

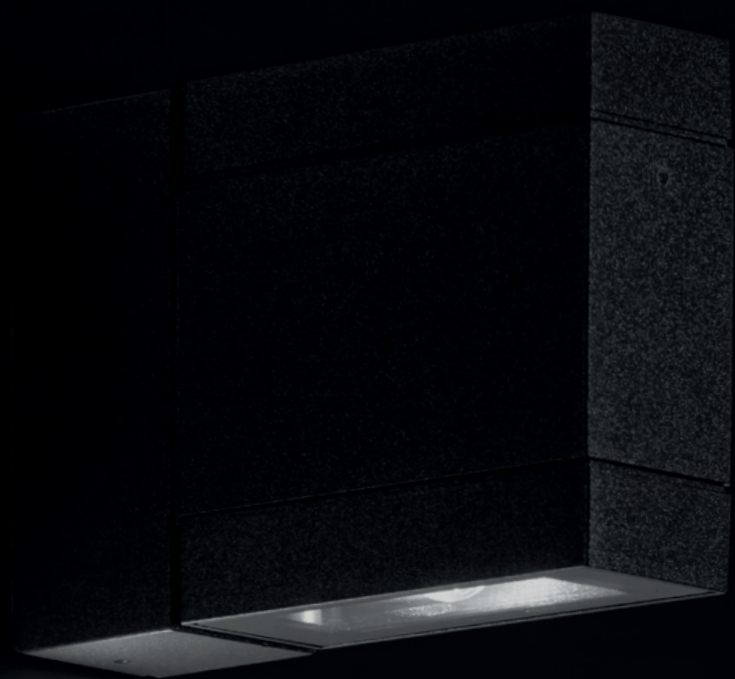

MODDO 603W

BEAM

BB

AB

optical variants
diversified needs
lighting designer

 Augenti[®]

MODO WALL



MODOWALL
GOOD
INSTALLATION
BY Augenti[®]
LIGHTING DESIGN



Augenti®

LIGHTING DESIGN

FRAMON GROUP



AUGENTI LIGHTING S.R.L. UNIPERSONALE

Via Francesco Lana, 31 - 25065 Lumezzane (BS) Italy - tel: (+39) 030 7282524 - fax: (+39) 030 7281879
info@augentilighting.it - www.augentilighting.it